



Lubricating oil export
PROFESSIONAL

FOR 12 YEARS

We specialize in providing ODM services for motorcycle, automotive, and industrial machinery lubricants

**Lubricating oil export
NUMBER ONE**



Sale manager: li wenjie
Whatsapp and Wechat: +8618174355818
Email: 191851445@qq.com

Lubricating oil export
PROFESSIONAL

FOR 12 YEARS

润滑油产品推荐手册

Lubricating Oil Product
Recommendation Manual



80,000M²
Plant Area
Equipped with fully automated production
lines and intelligent
three-dimensional warehouses



YEFE



case of key customers patrrtners

FOXCONN
富士康科技集团

AUX 奥克斯

GREE 格力



SAMSUNG
三星电子

中航工业



LG

Haier
海尔空调

Hisense
海信空调

三菱电机
MITSUBISHI ELECTRIC

SHARP
夏普

flex
伟创力科技

EPSON
爱普生科技

ZTE中兴

HUAWEI
华为技术

艾美特
艾美特

RICOH
理光办公

Cooperative countries



200 liter barrels at all angles

Tin cans



NEW!

60 liter barrels at all angles

Tin cans



NEW!

MOTO

MOTORCYCLE OIL

Lubricating oil export
NUMBER ONE

NEW!



"DOUBLE OIL FILM PROTECT" ENGINE OIL



Double layer oil film protection for cylinder and piston

OIL FILM OF MINERAL OIL



Damage of mineral oil film to cylinder and piston

YEFE lubricating oil

VS

Other lubricating oil

Recommended Motorcycle Oil Table



★★★★★ Key recommendation, super strong protection

★★★★ Recommended, Best Protection

★★★ Economic recommendation, great value protection



Mid-range motorcycles

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 100-200CC
displacement
straddle motorcycle

★★★★★

Economy motorcycles

HAOJUE/DAYANG
DAYUN/QIANJANG
LONCIN/BAJAJ
Mahindra/Hero/TVS
LML's 100-200cc
displacement
straddle motorcycle

★★★★★

Other measures to
protect the engine
from oil sludge
damage



Mid-range SCOOTER

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 100-200CC
displacement
scooter

★★★★★

Economy SCOOTER

HAOJUE/DAYANG
DAYUN/QIANJANG
LONCIN/BAJAJ
Mahindra/Hero/TVS
LML's 100-200cc
displacement
scooter

★★★★★

Mobile technology
provides excellent
value for oil sludge
protection



Mid to high end motorcycles

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 150-400CC
displacement
straddle motorcycle

★★★★★

Mid-range motorcycles

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 100-200CC
displacement
straddle motorcycle

★★★★★

Economy motorcycles

HAOJUE/DAYANG
DAYUN/QIANJANG
LONCIN/BAJAJ
Mahindra/Hero/TVS
LML's 100-200cc
displacement
straddle motorcycle

★★★★★

Synthetic technology
better protects
engines



Mid to high end SCOOTER

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 150-400CC
displacement
scooter

★★★★★

Mid-range motorcycles

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 100-200CC
displacement
scooter

★★★★★

Economy motorcycles

HAOJUE/DAYANG
DAYUN/QIANJANG
LONCIN/BAJAJ
Mahindra/Hero/TVS
LML's 100-200cc
displacement
scooter

★★★★★

Protection before
startup



High end motorcycle

HONDA/SUZUKI/
YAMAHA/Kawasaki
KYMC/SYM 's
250-1000CC
displacement
straddle motorcycle

★★★★★

High end Cross-country motorcycle

HONDA/SUZUKI/
YAMAHA/Kawasaki
KYMC/SYM 's
200-300CC
displacement
Cross-country
motorcycle

★★★★★

Mid-range motorcycles

HONDA/SUZUKI/
YAMAHA/KYMC
SYM 's 150-400CC
displacement
straddle motorcycle

★★★★★

Extremely fast
power and ultimate
protection

Note: 1. Due to slight differences in vehicle configuration and condition, the above recommended oils are for reference only
2. For a detailed list of oil usage, please consult with YEFE technical engineers

AUTO

Passenger car oil

Lubricating oil export
NUMBER ONE

NEW!



"DOUBLE OIL FILM PROTECT" ENGINE OIL



Double layer oil film protection for cylinder and piston

OIL FILM OF MINERAL OIL



Damage of mineral oil film to cylinder and piston

YEFE lubricating oil

VS

Other lubricating oil



Recommended Table for Automotive Engine Oil



★★★★★ Key recommendation, super strong protection

★★★★★ Recommended, Best Protection

★★★★★ Economic recommendation, great value protection



ENERGY SAVING MOTOR OIL

5W-30/10W-30
API SL/CF SN/CF

Mid range sedan
Hyundai/Kia/Foton/Skoda

Economy sedan
Santana/Jetta
Hongqi/Chery/Haval
BYD/Chery/Toyota
Economy Model

★★★★★

Other measures to protect the engine from oil sludge damage



Volkswagen Blue Oil

VW/Audi 0W-20
VW508.00/509.00
ACEA C5
VW TL52577
Porsche C20

★★★★★

VW/Audi 0W-30
ACEAC3 BMW
LONGLIFE04
MERCEDES BEN
MB229.31/229.51

★★★★★

VW/Audi 0W-40
ACEA C3 APISP MB
229.51 MB 229.52
RENAULT RN
0700RN 0710

★★★★★

Mobile technology provides excellent value for oil sludge protection



ENERGY SAVING MOTOR OIL

10W-40/5W-40
API SL/CF SN/CF

Mid range sedan
Hyundai/Kia/Foton/Skoda

★★★★★

Economy sedan
Santana/Jetta
Hongqi/Chery/Haval
BYD/Chery/Toyota
Economy Model

★★★★★

Synthetic technology better protects engines



ENERGY SAVING MOTOR OIL
API SP ILSAC GF-6A

Luxury sedan
Ferrari/Porsche
Bentley/BMW
Mercedes Benz
Lexus/Lincoln
Cadillac, etc

★★★★★

High end sedan
Toyota/Honda
/Mitsubishi/Nissan
/Crown/Acura
Buick/Ford, etc

★★★★★

Protection before startup



ENERGY SAVING MOTOR OIL

5W-40 0W-40
API SP ILSAC GF-6A
GM Dexos 1
GEN 3 Chrysler MS
6395 Ford
WSS-M2C961-A1

Luxury sedan
Ferrari/Porsche
Bentley/BMW
Mercedes Benz
Lexus/Lincoln
Cadillac, etc

★★★★★

Extremely fast power and ultimate protection

Note: 1. Due to slight differences in vehicle configuration and condition, the above recommended oils are for reference only
2. For a detailed list of oil usage, please consult with YEFE technical engineers



YEFE Car Maintenance Plan

The YEFE car maintenance plan is developed by "YEFE Technology" and "YEFE Laboratory", combining European and American car maintenance concepts, to launch the YEFE precise car maintenance project, based on the different stages of the car's condition, road conditions, and climate; We have developed a precise car maintenance solution based on the performance characteristics of the engine to serve a wide range of car owners; The launch of YEFE car maintenance mainly tells car owners that precise maintenance is necessary for cars to be more powerful, cost-effective, safer, extend their lifespan, reduce maintenance costs, and promote the maintenance concept of replacing repair with maintenance;

YEFE car maintenance,

Let you drive a new car every day,

1	0KM	Clean the lubrication system before replacing with new lubricating oil
2	5,000KM	Add a fuel decarbonizer
5	60,000KM	Replace transmission oil and power assist oil
3	10,000KM	Replace with a lubricating oil of suitable viscosity
4	40,000KM	Replace brake fluid and coolant Clean the throttle valve, fuel injector, and three-way catalyst

YEFE

SP Cool Class Fully Converted into Engine Oil (SP 5W-40 5W-30 0W-20 0W-30)



1LX12PCS 4LX4PCS

Meet or exceed the following standards:

API SP/CF; ACEA C2/C3/C5: ACEA C2 VW-Norm 504 00 und 507 00, MB-Freigabe 229.51; BW Longlife-04; Porsche C30PA0 base oil+synthetic ester and pulse blended with original American additives

Product Features

Imported raw materials: world-class base oils and additives, providing long-lasting and stable protection and power requirements for the engine. Efficient cleaning power: quickly dispersing engine carbon deposits and inhibiting the regeneration of gum, sludge, etc., reducing wear and noise. Advanced formula: scientifically formulated and blended, effectively extending the oil change cycle. Its excellent lubrication effect can meet the needs of the latest engines and many off-road rally events. Super wear resistance: enhancing oil film toughness and density, effectively preventing harmful gases from coming into contact with parts

SP Fully Synthetic Engine Oil (SP 5W-40 5W-30)



1LX12PCS 4LX4PCS

Meet or exceed the following standards:

AP SP/CF: ACEA A3/B3 A3/B4M B-229.1; Volvo VDS: Caterpillar To-2; Peugeot-Ci-troen (PSA) B71 2295; VW 501 01 (old) and 505; The molecular arrangement is more neat, with fewer impurities and smoother lubrication, making it easy to cope with harsh vehicle conditions

Product Features

Imported raw materials: world-class base oils and additives, providing long-lasting and stable protection and power requirements for the engine. Efficient cleaning power: quickly dispersing engine carbon deposits and inhibiting the regeneration of gum, sludge, etc., reducing wear and noise. Advanced formula: scientifically formulated and blended, effectively extending the oil change cycle. Its excellent lubrication effect can meet the needs of the latest engines and many off-road rally events. Super wear resistance: enhancing oil film toughness and density, effectively preventing harmful gases from coming into contact with parts



Passenger car engine oil



SN Synthesis Technology Engine Oil (10W-40 5W-40)



1LX12PCS 4LX4PCS

Meet or exceed the following standards:

Meets and exceeds the ACEA A3/B4 and API SN specifications of the American Petroleum Institute, and has obtained specification certifications from numerous European car manufacturers

Product Features

Imported raw materials: world-class base oils and additives, providing long-lasting and stable protection and power requirements for the engine. Efficient cleaning power: quickly dispersing engine carbon deposits and inhibiting the regeneration of gum, sludge, etc., reducing wear and noise. Advanced formula: scientifically formulated and blended, effectively extending the oil change cycle. Its excellent lubrication effect can meet the needs of the latest engines and many off-road rally events. Super wear resistance: enhancing oil film toughness and density, effectively preventing harmful gases from coming into contact with parts

SN Synthesis Technology Engine Oil (10W-30 5W-30)



1LX12PCS 4LX4PCS

Meet or exceed the following standards:

Meets and exceeds the ACEA A3/B4 and API SN specifications of the American Petroleum Institute, and has obtained specification certifications from numerous European car manufacturers

Product Features

Imported raw materials: world-class base oils and additives, providing long-lasting and stable protection and power requirements for the engine. Efficient cleaning power: quickly dispersing engine carbon deposits and inhibiting the regeneration of gum, sludge, etc., reducing wear and noise. Advanced formula: scientifically formulated and blended, effectively extending the oil change cycle. Its excellent lubrication effect can meet the needs of the latest engines and many off-road rally events. Super wear resistance: enhancing oil film toughness and density, effectively preventing harmful gases from coming into contact with parts

SP Super Fully Synthetic Engine Oil (Volkswagen Certified Edition) (0W-20)



1LX12PCS 4LX4PCS

Meet or exceed the following standards:

APISP ACEA C5 is particularly suitable for the latest National VI technology and compatible with Volkswagen VW50800/50900 blue-green oil standards for third-generation EA211 and EA888 National VI engines

Product Features

YEFE has upgraded its "Intelligent Molecular Clean Technology", which has three intelligent technological features to combat oil sludge carbon deposition: intelligent prevention, intelligent capture, and intelligent dispersion, to maintain the engine's long-lasting cleanliness using PolyAlphaole fins (PAOS) technology for fully synthetic base oil; Effectively reduce the LSPI (low-speed premature ignition) phenomenon of turbocharged engines and extend engine life; Excellent fuel economy performance, meeting the stringent fuel economy requirements of National VI vehicles, excellent antioxidant properties, effectively extending the service life of oil products; Effectively protect the GPF system of the National VI vehicle exhaust after treatment device

AUTO

Passenger car oil

Lubricating oil export
NUMBER ONE

For three consecutive years

NEW!





Passenger car engine oil

SP Cool Class Fully Converted into Engine Oil (SP 5W-40 5W-30 0W-20 0W-30) 1LX15PCS 4LX4PCS



Meet or exceed the following standards

API SP/CF; ACEA C2/C3/C5:
ACEA C2 VW-Norm 504 00
und 507 00,MB-Freigabe
229.51; BW Longlife-04;
Porsche C30PA0 base
oil+synthetic ester and pulse
blended with original
American additives

Product Features

Imported raw materials: world-class
base oils and additives, providing
long-lasting and stable protection
and power requirements for the
engine. Efficient cleaning power:
quickly dispersing engine carbon
deposits and inhibiting the
regeneration of gum, sludge, etc.,
reducing wear and noise. Advanced
formula: scientifically formulated
and blended, effectively extending
the oil change cycle. Its excellent
lubrication effect can meet the needs
of the latest engines and many
off-road rally events. Super wear
resistance:
enhancing oil film toughness and
density, effectively preventing
harmful gases from coming into
contact with parts

SP Fully Synthetic Engine Oil (SP 5W-40 5W-30)



Meet or exceed the following standards

AP SP/CF; ACEA A3/B3 A3/B4M
B-229.1:Volvo VDS: Caterpillar To-2;
PeugeotCi-troen (PSA) B71 2295;
VW 501 01 (old) and505; The
molecular arrangement is more neat,
with fewer impurities and smoother
lubrication, making it easy to cope
with harsh vehicle conditions

SN Synthesis Technology Engine Oil (10W-40 5W-40)

1LX15PCS 4LX4PCS



Meet or exceed the following standards

Meets and exceeds the ACEA
A3/B4 and API SN
specifications of the American
Petroleum Institute, and has
obtained specification
certifications from numerous
European car manufacturers

Product Features

Imported raw materials: world-class
base oils and additives, providing
long-lasting and stable protection
and power requirements for the
engine. Efficient cleaning power:
quickly dispersing engine carbon
deposits and inhibiting the
regeneration of gum, sludge, etc.,
reducing wear and noise. Advanced
formula: scientifically formulated
and blended, effectively extending
the oil change cycle. Its excellent
lubrication effect can meet the needs
of the latest engines and many
off-road rally events. Super wear
resistance:
enhancing oil film toughness and
density, effectively preventing
harmful gases from coming into
contact with parts

SN Synthesis Technology Engine Oil (10W-30 5W-30)



Meet or exceed the following standards

Meets and exceeds the ACEA
A3/B4 and API SN
specifications of the American
Petroleum Institute, and has
obtained specification
certifications from numerous
European car manufacturers



Transmission fluid

Fully Synthetic Constant-Voltage Transformer



1LX12PCS 4LX4PCS

Performance characteristics

- Good oxidation stability
and high-temperature
thermal stability.
- The lower static friction
coefficient enables the
hydraulic
transmissionsystem to
operate reliably,smoothly,
and significantly reduce
fuelconsumption.

Product features:

- 1.This product adopts super high performance synthetic
base oil and special additives,designed and developed
for the new generation of steel chain type and steel belt
type CVT stepless electronic transmis-sion:
- 2.Excellent low-temperature fluidity,anti-shaking and
durableperformance,ensuring smooth transmission shift and
effectively saving fuel;
- 3.Low foam cleanness and excellent com npatibility of seals,
effectively prevent the formation of sludge,and extend the life
**Note: Not applicable to AT automatic transmission and DCT
dual clutch transmission**

Fully Synthetic Automatic Transmission Fluid

ATF-5(Red) ATF-6(Red) ATF-7(Green) ATF-10(Red)



1LX12PCS 4LX4PCS

Performance characteristics

- Good oxidation stability
and high-temperature
thermal stability
- The lower static friction
coefficient enables the
hydraulic transmissi system
to operate reliably,smoothly,
and significantly reduce fuel
consumption.
- Low volatility can greatly
reduce evaporation loss.
- Excellent low-temperature
performance,ensuring good
fluidity at low temperatures

Product Features

- 1.The synthetic automatic transmission oil refined by
hydrocracking synthesis technology is a high-
performance automatic transmission oil:
- 2.It is specially developed for Mercedes Benz series
models equipped with nine speed automatic
transmission.It is based on the combination of modern
wear-resistant additives and friction improvers,and adds
an extremely stable viscosity indeximprover;
- 3.Excellent oxidation resistance,prevent oil aging and
prolong oil change cycle
**Note: Not applicable to DCT dual clutch transmission and
CVT continuously variable transmission**

Fully Synthesis Gear Oil (GF-5 75W-140 GL-5 80W-90 GL-5 85W-140)




1LX12PCS 4LX4PCS

Performance characteristics

- Good oxidation stability
and high-temperature
thermal stability
- The lower static friction
coefficient enables thel
hydra operate reliably,
smoothly,and significantly
reduce fuel
- Low volatility can greatly
reduce evaporation loss
- Excellent low-temperature
performance,ensuring
good fluidity at low
temperatures.

Product Features

- This product is formulated with fully synthetic base oil
and high-performance low friction additives. Specially
developed for overload drive systems and manual gear
transmissions, drive axle gears, and hyperbolic shaft
gears; It has the following content:
1. High performance base oil and additives ensure stable
oil film for gear protection
 2. Excellent adhesive temperature characteristics ensure
good wear resistance and protection conditions at high
temperatures, ensuring stable power output
 3. Prevent oil aging and extend oil change intervals.

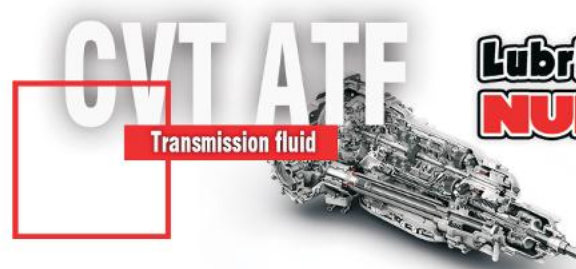

**Lubricating oil export
NUMBER ONE**

For three consecutive years

NEW!

DIESEL

Diesel engine oil

NEW!



"DOUBLE OIL FILM PROTECT" ENGINE OIL

YEFE lubricating oil



Double layer oil film protection for cylinder and piston

OIL FILM OF MINERAL OIL

VS



Damage of mineral oil film to cylinder and piston

Other lubricating oil



Diesel engine oil



CK-4 20W-50 ACEA E9

4LX4PCS 18L 60L 200L



Meet the following manufacturer specifications

Cummins CES20081, Carpillar CAT ECF-3, Volvo Volvo VDS -4, Mark Mack EO-0 pp, Renault RLD-3, Mercedes Benz Daimler MB228.31, MAN M3575 Annette MTU Type 2.1, DeutzDQC I-10LA, Detroit Diesel DDC 93K218

Product Description

In various engineering machinery industries such as mining, construction, and agriculture. This product adopts a brand new fully synthetic and environmentally friendly technology formula. Suitable for use in light and heavy-duty diesel engines using advanced emission devices such as SCR (selective catalytic reduction), EGR (exhaust gas recirculation), DPF (diesel particulate filter), etc

CI-4 20W-50 ACEA E7

4LX4PCS 18L 60L 200L



Meet the following manufacturer specifications

Mercedes Benz Daimler MB 228.3, Caterpillar CAT ECF-3/ECF-2, Volvo Volvo VDS-4 Cummins 20081, Mark MACK EO-0 PREMIUM PLUS, Detroit Diesel 7LDetroit Diesel PGOS 93K218, ZUM # MTU Category

Product Description

The product adopts a brand new fully synthetic technology formula. Suitable for use in light and heavy-duty diesel engines using advanced emission devices such as SCR (selective catalytic reduction), EGR (exhaust gas recirculation), and DPF (diesel particulate filter).

CH-4 20W-50 ACEA E3

4LX4PCS 18L 60L 200L



Product Description

- Applicable to all diesel engines, including those that meet National VI emission requirements, have an exhaust gas recirculation (EGR) system. choose catalytic reduction (SCR), or have a particulate filter (DPF).
- It is also suitable for low-speed diesel engines in mining, construction.

Product performance standards

- Balanced formula to ensure stable oil pressure during engine operation;
- Excellent antioxidant and detergent dispersibility, reducing the formation of piston deposits, reducing wear, and providing full cycle protection for the engine
- Excellent shear stability and thermal stability, ensuring normal operation while reducing fuel consumption Good air release and anti foaming properties, reducing engine valve corrosion and wear

CF-4 20W-50 ACEA

4LX4PCS 18L 60L 200L



Product Description

- Applicable to all diesel engines, including those that meet National VI emission requirements, have an exhaust gas recirculation (EGR) system. choose catalytic reduction (SCR), or have a particulate filter (DPF).
- It is also suitable for low-speed diesel engines in mining, construction.

Product performance standards

- Balanced formula to ensure stable oil pressure during engine operation;
- Excellent antioxidant and detergent dispersibility, reducing the formation of piston deposits, reducing wear, and providing full cycle protection for the engine
- Excellent shear stability and thermal stability, ensuring normal operation while reducing fuel consumption Good air release and anti foaming properties, reducing engine valve corrosion and wear

Construction machinery

Hydraulic oil

NEW!



"DOUBLE OIL FILM PROTECT" ENGINE OIL

YEFE lubricating oil



Double layer oil film protection for cylinder and piston

VS

OIL FILM OF MINERAL OIL



Damage of mineral oil film to cylinder and piston

Other lubricating oil



Hydraulic oil



Fully synthetic high-temperature and high-pressure anti-wear hydraulic oil L-HM 46#

18L 200L



Product Features

- Excellent anti emulsification and filtration properties can quickly separate the water mixed in the oil, reduce filter blockage, and ensure normal lubrication of the oil;
- Various conventional sealing materials have good adaptability.

Product performance standards

- Suitable for medium and high pressure hydraulic systems in industries, shipping, and mobile machinery equipment;
 - Suitable for medium and high pressure hydraulic systems in engineering machinery, construction machinery, mining machinery, etc.
- Specifications and standards: Meet the requirements of ISO 11158L-HM. German DIN51524 part, Denison HF-O Cincinnati Milacron P68, P70, P69. GB 11118.1. etc.

Fully synthetic high-pressure ashless anti-wear hydraulic oil L-HM 68#

18L 200L



Product Description

- Applicable to all diesel engines, including those that meet National VI emission requirements, have an exhaust gas recirculation (EGR) system. choose catalytic reduction (SCR), or have a particulate filter (DPF).
- It is also suitable for low-speed diesel engines in mining, construction.

Product performance standards

- Suitable for medium and high pressure hydraulic systems in industries, shipping vessels, and mobile machinery and equipment;
 - Suitable for medium and high pressure hydraulic systems in engineering machinery, construction machinery, mining machinery, metallurgical equipment, etc.
- Specifications and standards: Meet GB11118.1-2011 (high voltage), Denison HF-O/HF-1/HF-2, ISO11158 L-HM, Cincinnati Milacron P68, P70, P69, Eaton 03-401-2010, etc

Synthetic hydraulic 8#

18L 200L



Specifications and standards

Comply with German DIN51524 part. Denison; HF-O, ISO 11158-LM GB 11118.1 and other specification requirements

Product performance standards

- Suitable for medium and low pressure industrial hydraulic equipment under general working conditions; Mobile mechanical hydraulic equipment, such as excavators, overweight machines, bulldozers, etc.
- Suitable for medium and low hydraulic equipment in shipping.

Synthetic hydraulic 68#

18L 200L



Specifications and standards

Comply with German DIN51524 part. Denison; HF-O, ISO 11158-LM GB 11118.1 and other specification requirements

Product performance standards

- Suitable for medium and low pressure industrial hydraulic equipment under general working conditions; Mobile mechanical hydraulic equipment, such as excavators, overweight machines, bulldozers, etc.
- Suitable for medium and low hydraulic equipment in shipping.



Gear oil and Coolant

GEAR OIL(GF-5 85W-90)

18L 60L 200L 4LX4PCS



Meet or exceed the following standards

Specially configured for heavy-duty tail axles and rear axles that meet extreme pressure and impact load conditions; Stable high and low temperature performance, high temperature oxidation resistance, vehicle gear set provides all-weather protection during high-speed low torque, low-speed high torque operation; Excellent high load-bearing capacity, preventing gear scratches and reducing wear under harsh conditions;

Product Features

Excellent anti-corrosion, anti rust, anti foaming and storage stability, effectively protecting the normal operation of gear component systems; Excellent rubber compatibility reduces leakage and maintains long-lasting sealing..
Scope of application: Suitable for various imported and domestic cargo and passenger commercial vehicles, as well as various standard double-sided gear drive axles and drive shaft lubrication.

GEAR OIL(GF-5 85W-140)

18L 60L 200L 4LX4PCS



Meet or exceed the following standards

Specially configured for heavy-duty tail axles and rear axles that meet extreme pressure and impact load conditions; Stable high and low temperature performance, high temperature oxidation resistance, vehicle gear set provides all-weather protection during high-speed low torque, low-speed high torque operation; Excellent high load-bearing capacity, preventing gear scratches and reducing wear under harsh conditions;

Product Features

Excellent anti-corrosion, anti rust, anti foaming and storage stability, effectively protecting the normal operation of gear component systems; Excellent rubber compatibility reduces leakage and maintains long-lasting sealing..
Scope of application: Suitable for various imported and domestic cargo and passenger commercial vehicles, as well as various standard double-sided gear drive axles and drive shaft lubrication.

COOLANT (YEFE Long-lasting Antifreeze -25°C)

Meet or exceed the following standards

- Specially formulated for long-lasting and reliable cooling performance under various weather conditions;
- Effective in preventing engine overheating in summer and freezing in winter;
- Excellent thermal stability and corrosion resistance, ensuring protection for radiator and engine components;
- Compatible with most vehicle types and coolant systems, preventing scale build-up and extending system life.

Product Features

- Superior anti-rust, anti-corrosion, and anti-foaming properties for enhanced durability;
- Stable chemical composition for long-term storage and performance;
- Non-toxic, eco-friendly formulation;
- Scope of application: Suitable for use in a wide range of imported and domestic vehicles, including passenger cars, trucks, buses, and construction machinery.



1LX12PCS 4LX4PCS

COOLANT

And GEAR OIL

**Lubricating oil export
NUMBER ONE**

For three consecutive years

NEW!



Diesel engine oil



CK-4 20W-50 ACEA E9

18L 200L



60L

200L

Meet the following manufacturer specifications

Cummins CES20081, Carpillar CAT ECF-3, Volvo Volvo VDS -4, Mark Mack EO-0 pp, Renault RLD-3, Mercedes Benz Daimler MB228.31, MAN M3575 Annette MTU Type 2.1, DeutzDQC I-10LA, Detroit Diesel DDC 93K218

Product Description

In various engineering machinery industries such as mining, construction, and agriculture. This product adopts a brand new fully synthetic and environmentally friendly technology formula. Suitable for use in light and heavy-duty diesel engines using advanced emission devices such as SCR (selective catalytic reduction), EGR (exhaust gas recirculation), DPF (diesel particulate filter), etc

CI-4 20W-50 ACEA E7

18L 200L



60L

200L

Meet the following manufacturer specifications

Mercedes Benz Daimler MB 228.3, Caterpillar CAT ECF-3/ECF-2, Volvo Volvo VDS-4 Cummins 20081, Mark MACK EO-0 PREMIUM PLUS, Detroit Diesel 7LDetroit Diesel PGOS 93K218, ZUM # MTU Category

Product Description

The product adopts a brand new fully synthetic technology formula. Suitable for use in light and heavy-duty diesel engines using advanced emission devices such as SCR (selective catalytic reduction), EGR (exhaust gas recirculation), and DPF (diesel particulate filter).

CH-4 20W-50 ACEA E3

18L 200L



60L

200L

Product Description

- Applicable to all diesel engines, including those that meet National VI emission requirements, have an exhaust gas recirculation (EGR) system. choose catalytic reduction (SCR), or have a particulate filter (DPF).
- It is also suitable for low-speed diesel engines in mining, construction.

Product performance standards

- Balanced formula to ensure stable oil pressure during engine operation;
- Excellent antioxidant and detergent dispersibility, reducing the formation of piston deposits, reducing wear, and providing full cycle protection for the engine
- Excellent shear stability and thermal stability, ensuring normal operation while reducing fuel consumption Good air release and anti foaming properties, reducing engine valve corrosion and wear

CF-4 20W-50 ACEA

18L 200L



60L

200L

Product Description

- Applicable to all diesel engines, including those that meet National VI emission requirements, have an exhaust gas recirculation (EGR) system. choose catalytic reduction (SCR), or have a particulate filter (DPF).
- It is also suitable for low-speed diesel engines in mining, construction.

Product performance standards

- Balanced formula to ensure stable oil pressure during engine operation;
- Excellent antioxidant and detergent dispersibility, reducing the formation of piston deposits, reducing wear, and providing full cycle protection for the engine
- Excellent shear stability and thermal stability, ensuring normal operation while reducing fuel consumption Good air release and anti foaming properties, reducing engine valve corrosion and wear



Hydraulic oil

Fully synthetic high-temperature and high-pressure anti-wear hydraulic oil L-HM 46#



60L 200L

Product Features

- Excellent anti emulsification and filtration properties can quickly separate the water mixed in the oil, reduce filter blockage, and ensure normal lubrication of the oil;
- Various conventional sealing materials have good adaptability.

Product performance standards

- Suitable for medium and high pressure hydraulic systems in industries, shipping, and mobile machinery equipment;
 - Suitable for medium and high pressure hydraulic systems in engineering machinery, construction machinery, mining machinery, etc.
- Specifications and standards:
Meet the requirements of ISO 11158L-HM. German DIN51524 part, Denison HF-O Cincinnati Milacron P68, P70, P69. GB 11118.1. etc.

Fully synthetic high-pressure ashless anti-wear hydraulic oil L-HM 68#



60L 200L

Product Description

- Applicable to all diesel engines, including those that meet National VI emission requirements, have an exhaust gas recirculation (EGR) system, choose catalytic reduction (SCR), or have a particulate filter (DPF).
- It is also suitable for low-speed diesel engines in mining, construction.

Product performance standards

- Suitable for medium and high pressure hydraulic systems in industries, shipping vessels, and mobile machinery and equipment;
 - Suitable for medium and high pressure hydraulic systems in engineering machinery, construction machinery, mining machinery, metallurgical equipment, etc.
- Specifications and standards: Meet GB11118.1-2011 (high voltage), Denison HF -O/HF-1/HF-2, ISO11158 L-HM, Cincinnati Milacron P68, P70, P69, Eaton 03-401 -2010, etc

Synthetic hydraulic 8#



60L 200L

Specifications and standards

Comply with German DIN51524 part. Denison; HF-O, ISO 11158-LM GB 11118.1 and other specification requirements

Product performance standards

- Suitable for medium and low pressure industrial hydraulic equipment under general working conditions; Mobile mechanical hydraulic equipment, such as excavators, overweight machines, bulldozers, etc.
- Suitable for medium and low hydraulic equipment in shipping.

HI-TEMP #2 GREASE (-20°C~180°C)

0.25KGX48PCS 0.5KGX24PCS 1.0KGX12PCS



0.5KG 1.0KG

Performance characteristics

Good high and low temperature performance, especially excellent temperature performance
Excellent performance, durable at high temperatures, long bearing life
Good water resistance, suitable for bearing lubrication in humid environments
Good anti axial performance ensures long-term use performance at high temperatures

Scope of application

This product is suitable for on-site work in high-temperature, high-speed, or extremely cold areas, with temperatures exceeding 200 ° C. Suitable for lubrication of rolling bearings operating in a wide temperature range, such as sports motors and electrical appliances, clutch thrust bearings, high-temperature fans, racing wheel bearings, compressors, and other high-temperature operations
Appropriate temperature:
-20 ° C+180 ° C, short-term up to 250 ° C



Grese and AdBlue



HI-TEMP #3 GREASE (-20°C~180°C)

0.25KGX48PCS 0.5KGX24PCS 1.0KGX12PCS



0.5KG 1.0KG

Performance characteristics

Good high and low temperature performance, especially excellent temperature performance
Excellent performance, durable at high temperatures, long bearing life
Good water resistance, suitable for bearing lubrication in humid environments
Good anti axial performance ensures long-term use performance at high temperatures

Scope of application

This product is suitable for on-site work in high-temperature, high-speed, or extremely cold areas, with temperatures exceeding 200 ° C. Suitable for lubrication of rolling bearings operating in a wide temperature range, such as sports motors and electrical appliances, clutch thrust bearings, high-temperature fans, racing wheel bearings, compressors, and other high-temperature operations
Appropriate temperature:
-20 ° C+180 ° C, short-term up to 250 ° C

HI-TEMP #220 GREASE (-20°C~180°C)

0.39KGX40PCS



0.39KG

Performance characteristics

- Extended Service for High Temperatures
- Recommended for use in industrial applications, chassis components and farm equipment.
- Sticky formulation stays in applications longer

Scope of application

Multi-Purpose Grease

ISO VG 220 NLGI 2

Grasa Multiproposito

Thickener - Espesante - Epaississant
Lithium Complex

Graisse tout-usage

Color - Couleur
Blue/AzuVbleu

AdBlue (For SCR system) Diesel Exhaust Fluid

10KGX2PCS 20KGX1PCS



10KG



20KG

Scope of application

China IV (Euro IV), China VI (Euro V), and China VI (Euro VI) diesel engines using SCR technology, including various types of buses, light, medium/heavy trucks, special vehicles, construction machinery, etc.

Storage conditions

Please store the product in the following environment at 25C and avoid direct sunlight. When the temperature is below -11C, the urea solution will crystallize, and the crystallization process will not damage the urea solution. The concentration and quality of the urea solution will resume thawing in the following time, and the thawing temperature should not exceed 40 ° C.

Product Features

1. This product is a NOx selective catalytic reduction agent, which is suitable for all China VI (Euro VI) and above emission diesel engine SCR systems, and this product is the standard configuration of SCR technology.
2. This product especially adopts a more advanced multi-layer graded filtration (filter membrane technology, which can effectively reduce the condensate such as biuret, ionic polymer, insoluble matter and other condensates in the product, and improve the stability of urea products.
3. This product converts it into nitrogen and water by producing a selective catalytic reduction reaction with NOx in the tail gas, thereby reducing the emission of nitrogen oxides.
4. This product can effectively improve the operation efficiency of SCR system and reduce fuel consumption.



Gear oil and Engine cleaner

GEAR OIL(GF-5 85W-90)

18L 60L 200L 4LX4PCS



60L 200L

Meet or exceed the following standards

Specially configured for heavy-duty tail axles and rear axles that meet extreme pressure and impact load conditions; Stable high and low temperature performance, high temperature oxidation resistance, vehicle gear set provides all-weather protection during high-speed low torque, low-speed high torque operation; Excellent high load-bearing capacity, preventing gear scratches and reducing wear under harsh conditions;

Product Features

Excellent anti-corrosion, anti rust, anti foaming and storage stability, effectively protecting the normal operation of gear component systems; Excellent rubber compatibility reduces leakage and maintains long-lasting sealing..
Scope of application: Suitable for various imported and domestic cargo and passenger commercial vehicles, as well as various standard double-sided gear drive axles and drive shaft lubrication.

GEAR OIL(GF-5 85W-140)

18L 60L 200L 4LX4PCS



60L 200L

Meet or exceed the following standards

Specially configured for heavy-duty tail axles and rear axles that meet extreme pressure and impact load conditions; Stable high and low temperature performance, high temperature oxidation resistance, vehicle gear set provides all-weather protection during high-speed low torque, low-speed high torque operation; Excellent high load-bearing capacity, preventing gear scratches and reducing wear under harsh conditions;

Product Features

Excellent anti-corrosion, anti rust, anti foaming and storage stability, effectively protecting the normal operation of gear component systems; Excellent rubber compatibility reduces leakage and maintains long-lasting sealing..
Scope of application: Suitable for various imported and domestic cargo and passenger commercial vehicles, as well as various standard double-sided gear drive axles and drive shaft lubrication.

AIL Purpose Powerful Cleaning Water (ENGINE CLEANER)

0.5LX24PCS 6LX1PCS



0.5L 5.0L

Meet or exceed the following standards

- Designed for surface cleaning of vehicles and equipment, effectively removing stubborn dirt, oil, and grime.
- Neutral formula, safe for use on metal, paint, plastic, and rubber surfaces.
- Stable performance in high and low temperatures.
- Ideal for both daily and deep cleaning applications.

Product Features

- Excellent decontamination power with anti-corrosion and anti-rust properties.
- Anti-foaming and long-lasting storage stability.
- Mild formula, safe for hands, low odor.
- Scope of application: Suitable for cleaning cars, trucks, motorcycles, machinery, tools, windows, and other hard surfaces.

Powerful

Powerful Cleaning Water

Lubricating oil export
NUMBER ONE

For three consecutive years

NEW!



Industrial hand sanitizer and laundry detergent



Heavy oil cleaner

2.0LX6PCS 1.0LX15PCS 0.5LX24PCS




2.0LX6PCS

matters needing attention

*For industrial use only, not suitable for household use.
1. Contains frosted particles. If it solidifies due to low temperature, gently shake before use. This is a normal phenomenon. Just shake well before use.
2.If ingested, please drink water, induce vomiting, and seek medical assistance.
3. Store in a cool and shady place, away from children.Instructions for use: Apply the product to dirty hands, rub and rinse to remove grease.

Remarks

Main Ingredients: Deionized water anionic surfactants, nonionic surfactants natural abrasives, propylene glycol, emulsifiers, additives fragrances, camphor preservatives.
Applicable Areas: Industrial settings like printing, painting, auto repair, and more where heavy grease is present.
Usage method: Apply product to dirty hands, rub, and rinse for grease removal.

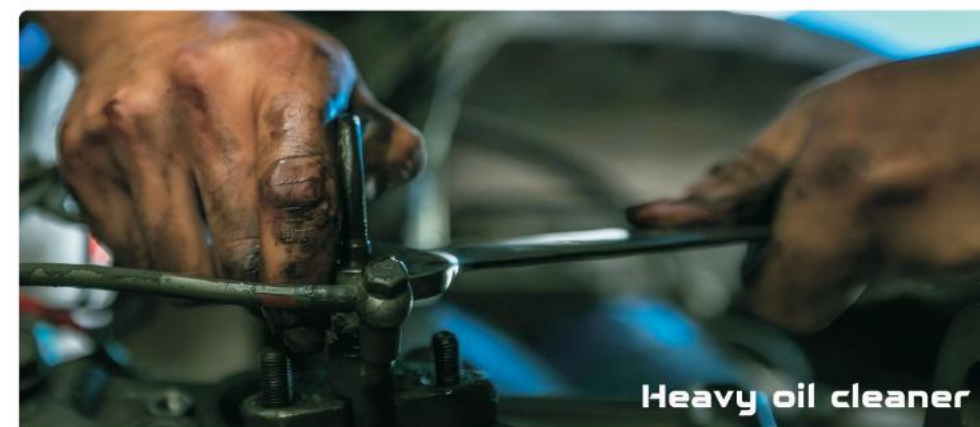

Heavy oil cleaner



Heavy duty Degreasing Laundry Detergent

2.0LX6PCS 1.0LX15PCS 0.5LX24PCS



2.5LX6PCS


Performance characteristics

The Heavy-duty Degreasing Laundry Detergent powerfully cleans grease and oily stains on your clothes, uniform and workware. Ideal for the catering, mechanical, tooling, mining and other industrial environments.
Machine Wash: Add clothes to the washer, apply detergent into the washer and wash as directed.

Directions

Machine Wash: Add clothes to the washer, apply detergent into the washer and wash as directed.
Hand Wash: Wet fabric and apply detergent onto tough spots and stains, rub gently, wait 1 hour then wash as directed.
Ingredients: Water, C10-16 pareth or C12-15 alcohols ethoxylated, sodium laureth sulfate, sodium carbonate, sodium bicarbonate(baking soda), acrylic acid homopolymer, sodium hydroxide, fragrances, colorants.

Heavy duty
Degreasing Laundry Detergent

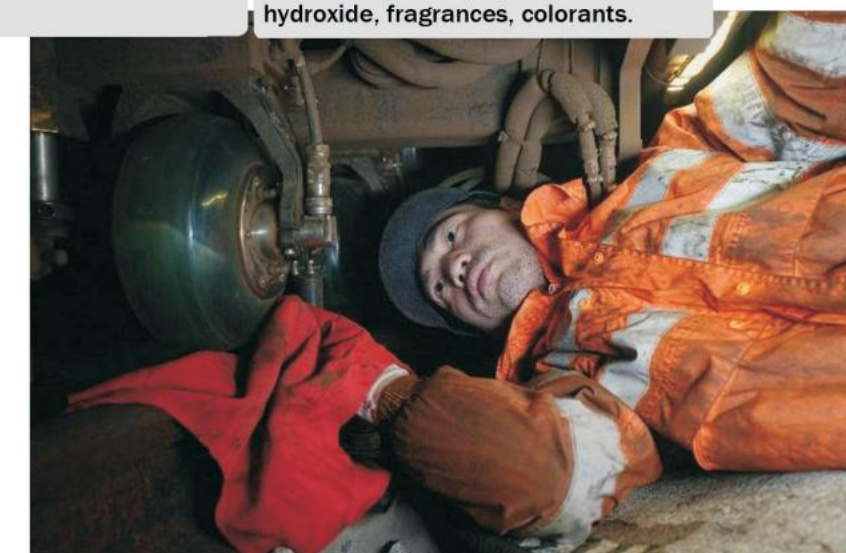



Car care and maintenance categories

Carb Cleaner (Effectively removing mud and dirt)



450mlX24PCS

Usage method

1. This product may have impact on some surface. It should be tested in a inconspicuous place before the first time use.
2. Shake well before use. keep the bottle vertical as possible as you can when use. less than 30° Angle.
3. Spray evenly at a distance 15cm - 25cm from the object surface
4. Spray the product emerly onto the cleaned surface , After about 10s when the prlch is obviously dissolved, wipe the surface wit amaseft cloth.
5. Thick dirt can be cleaned repeatedly until it is clean.
6. After clean the pitch, you may clean and wax the car paint surface for maintenance.

Cautions

- Excellent anti emulsification and filtration properties can quickly separate the water mixed in the oil, reduce filter blockage, and ensure normal lubrication of the oil;
- Various conventional sealing materials have good adaptability.

Dash board polish(Effectively protect, clean, and moisturize leather)



450mlX24PCS

Usage method

This product is suitable to bright the hard surface of genuine leather, leather, pinstic, easy to ues, just spray and wipe, can make the car leather seat R88-tore glossy, make dashboard, tire surface bright and gorgeous as new, can effectively prevent plastic products, synthetic plastic from aging. weanwhi-le, this product has good lubricating property, can effectively prevent the object surface from roughn ess, make the object glossy. This product is suitable for automobile and home use.

Cautions

1. Shake well before use, keep the bottle vertical as possible as you can when use, less than 30° Angle.
2. Spray evenly at a distance 15cm - 25cm from the object surface.
3. Gently press the nozzle to spray a layer back and forth, wipe evenly with a clean&soft cloth.
4. When the leather seat and dashboard need to polish, spray the product on the surface for a moment, then wipe with clean&soft cloth,bright effect will appear immediately.

Grease spray(Lubrication rust prevention, and elimination of abnormal noise)



450mlX24PCS

Usage method

This product is a multifunctional maintenance agent for rust prevention, rust removal, dehumidification, lubrication, and cleaning. It provides long-lasting anti-wear and anti-corrosion properties for metals. It has efficient penetration, noise elimination, and rapid lubrication functions.

Scope of use

Widely used in conveyor belts, various metal fasteners, sliders, mechanical pants, cranes, tracks, door and window tracks, zippers, tools, bicycle chains, iron locks, and various hardware

TEMPERATURE RANGE
- 20°C-120°C

Pitch Cleaner (Cleaning asphalt stains on vehicles)



450mlX24PCS

Usage method

This product is suitable to bright the hard surface of genuine leather, leather,plastic.easy to use, just spray and wipe, can make the car leather seat rea-tore glossy, make dashboard, tire surface bright and gorgeous as new, can effectively prevent plastic products, synthetic plastic from aging. Meanwhi-le, this product has good lubricating property, can effectively prevent the object surface from roughn ess, make the object glossy. This product is suitable for automobile and home use.

Scope of use

1. Shake well before use,Spray evenly at a distance 15cm ~ 25cm from the object surface.
2. When the leather seat and dashboard need to polish, spray the product on the surface for a moment, then wipe with clean&soft cloth, bright effect will appear immediately.



Shipping & Payment



TYPE OF SHIPPING

Generally speaking:

Generally speaking,

1 . We use international express delivery, DHL, UPS, FEDEX, EMS, TNT, etc. for samples (excluding contents).

2 . Large orders (or samples containing contents):

You can choose between car transportation, railway transportation, or ocean transportation. If you have your own freight forwarder, please provide us with detailed information.



Automobile transportation



Railway transportation



Ocean transportation

PAYMENT

Generally speaking:



Trade Assurance: For the first order, we recommend that you use Trade Assurance.

T/T: If there is inventory, 100% payment will be made before shipment; If customizing an order, 30% of the payment should be made before production, and the remaining 70% should be paid before delivery.

Western Union, AliExpress, and PayPal are all available.

Letter of Credit: Used for large orders.